

POOMA 65

PTO Pump



Our reputation is spreading

The Williams Pooma 65 Pump is specifically designed to handle effluent with a high level of suspended solids. The double chopper system finely macerates all fibrous material, greatly reducing the chance of system blockages. The Pooma Pump is fitted with a mechanical seal lubrication chamber that will keep the mechanical seal lubricated if the pump was to run dry for a short period. The pump can be mounted on a 3 point linkage frame or trailer.

FEATURES

Overdrive gearbox	Hand primer standard, auto primer available
Double chopper system	6.6 metre 150mm suction assembly
Mechanical seal lubricator	Galvanised suction strainer
80mm double outlet with gate valves	NZ Designed and Manufactured
3.0 metres of 75mm flexi pipe and fittings	Neat and tidy, easy to use
Safety shear pin on impeller	Built to last and cost effective




www.williamsirrigation.com

Williams' Pooma 65 Pump

PTO PUMP ADD-ONS

- 5m of 150mm suction hose complete
- 3m of 75mm outlet delivery hose complete
- 10m of 63mm stirrer pipe line
- Stirrer pipe
- Drive shaft
- Taps and camlocks

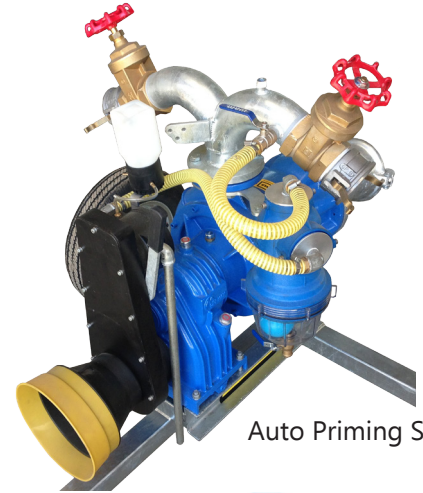

Auto Priming System

SPECIFICATIONS

"A" impeller at 540rpm

Tractor power of 80hp+ required

Flow (m3/hr)	0	30	45	60	75	90	105	120	150
Head (metres)	125	120	118	115	111	106	101	96	82



Double chopper system with a multi-channel impeller.

TALK TO US ABOUT YOUR **EFFLUENT SPREADING** REQUIREMENTS AND WE CAN TAILOR MAKE A SYSTEM TO SUIT YOUR NEEDS

WE'VE GOT THE MOOPOO SOLUTION FOR YOU

TRAVELLING IRRIGATORS



Greenback Spider



GB Magnum



Spider Deluxe



Deluxe Junior



Venom

PTO



PTO Stirrers




PTO Pumps

HYDRANTS



Zero-0-Loss Hydrant




Riser Hydrant

FILTERS & PONTOONS



In-Line Filter



Pontoon

WILLIAMS ENGINEERING 2011 LTD

Waitakaruru RD 6,
Thames 3576, New Zealand

07 867 3176 or 0800 4 EFFLUENT (0800 433 358)
07 867 3179

www.williamsirrigation.com
info@williamsirrigation.co.nz