



ZERO-0-LOSS

Hydrant Unit

WILLIAMS

Our reputation is spreading

The Basic Hydrant unit comes with the frame and changeover tube with pressure sealing v seals. Just add the inlet and outlet fittings to suit your application. The fittings are available to fit 63mm OD, 75mm OD and 90mm OD alkathene or male thread, straight or angled. Locate hydrants to service the furthestmost area from that point. Situate the hydrant at the side of a raceway and at every second fence line, then you can service four paddocks from one hydrant point using a short feeder line to cross under the raceway.


FEATURES

No head/pressure loss	Extend or alter anytime
Range and size of fittings to suit any configuration	Totally hot-dipped galvanised
Can be used with surface or buried lines	Eliminates pipeline blockages
No buried fittings to corrode	NZ Designed and Manufactured, Patent Pending
No sharp bends for sediment build-up	Neat and tidy, easy to use
Quick to change flow direction	Built to last
Self sealing couplings	Cost effective



www.williamsirrigation.com


Williams' Zero-0-Loss Hydrant

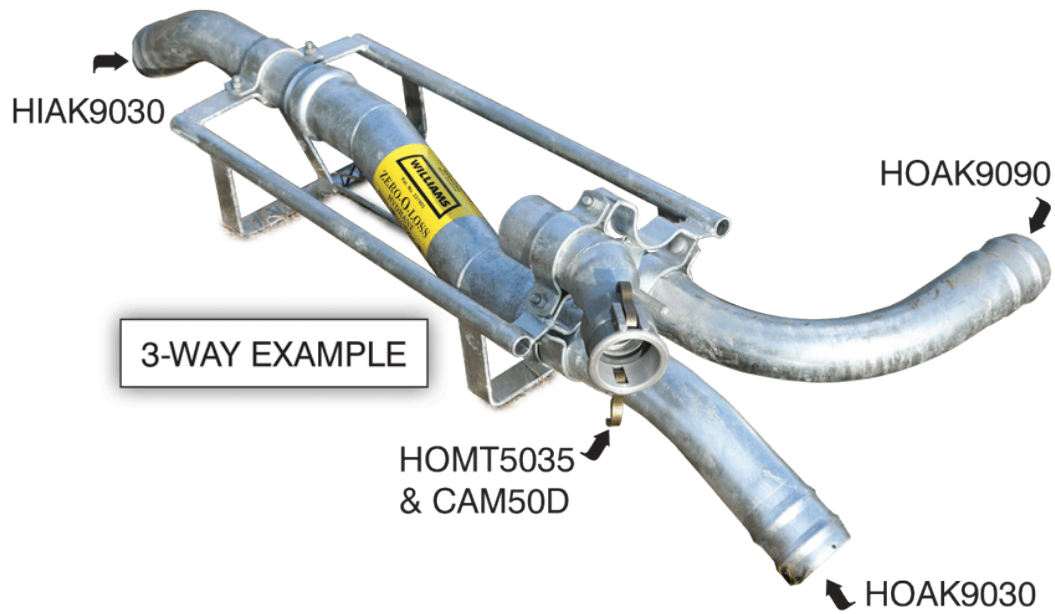

TALK TO US ABOUT YOUR **EFFLUENT SPREADING** REQUIREMENTS AND WE CAN TAILOR MAKE A SYSTEM TO SUIT YOUR NEEDS

WE'VE GOT THE MOOPOO SOLUTION FOR YOU

TRAVELLING IRRIGATORS

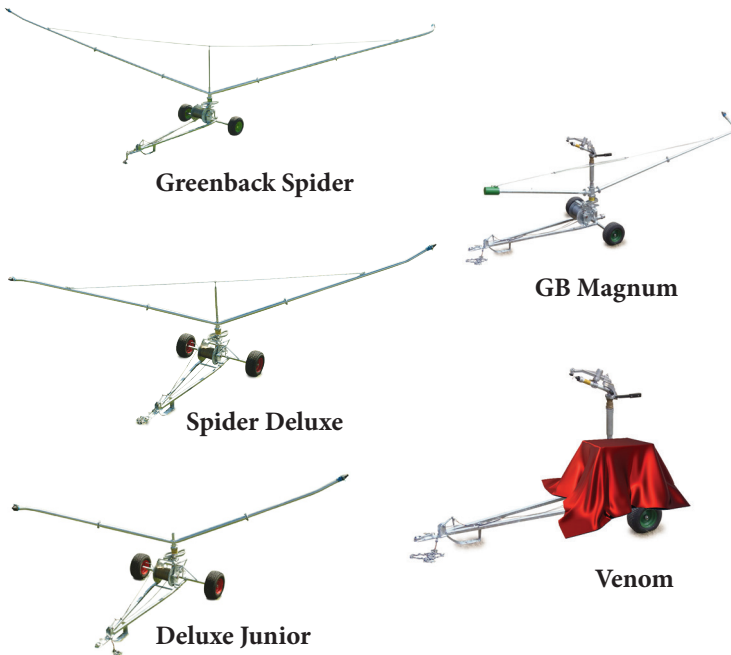

PTO



PTO Stirrers

PTO Pumps


HYDRANTS



Zero-0-Loss Hydrant

Riser Hydrant

FILTERS & PONTOONS

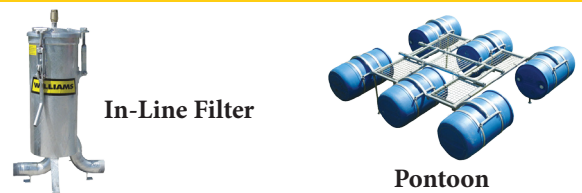

In-Line Filter

Pontoon

WILLIAMS ENGINEERING 2011 LTD

Waitakaruru RD 6,
Thames 3576, New Zealand

07 867 3176 or 0800 4 EFFLUENT (0800 433 358)
07 867 3179

www.williamsirrigation.com
info@williamsirrigation.co.nz